© 2007 COX ENGINEERING DBA CAMBRIDGEPORT AIR SYSTEMS.
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
COX ENGINEERING COMPANY DBA CAMBRIDGEPORT AIR SYSTEMS.
THIS DOCUMENT OR THE INFORMATION CONTAINED IN WHOLE OR IN PART
MAY NOT BE ISSUED TO ANOTHER PARTY WITHOUT WRITTEN CONSENT AND
AUTHORIZATION FROM CAMBRIDGEPORT.

Approval Block Company: _____

Approved By: _____ Notes:

CERTIFIED WIND/HURRICANE ROOF CURB SUBMITTAL # 1015288

CARRIER 3A


1015288


Drawn Date: 11/4/09

Rev. D (RTO 02/10/2020)

Drawn By: CDM

Estimated Weight: 176.02 LBS.

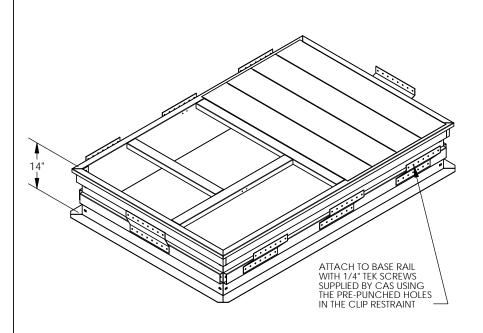

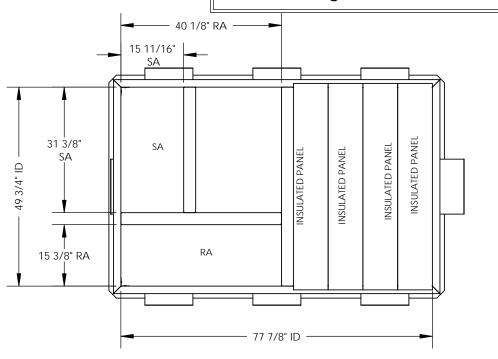

FEATURES:


Date: ___

Job Name:

- Built to NRCA Standards.
- Mitered Corners.

- 5.
- Gasket Provided for Unit to Curb Sealing.
 Curb Fabricated of Heavy Gauge Galvanized (G90) Steel.
 Full Perimeter Wood Nailer Included.
 Pre-Punched Holes and Hardware Included for Curb Assembly.
 Attachment Clips and Screws to Secure RTU to Curb Included.
 Curb is Shipped Unassembled.
 Curb is John Led with PTU 4 ff Applicable. 6. 7.

- Curb is Labeled with RTU # if Applicable
 Designed to Withstand Most Severe Wind Loads Designated by All Current Building Codes.
 Certified Site-Specific Calculations Stamped by Registered PE Available. 10



Cambridgeport

4 Carlton Drive Georgetown MA 01833

1-800-648-2872

HVAC Accessories & Engineered Systems